

14/10/2008 1:16:41 PM

Process Sheet

CU-DAR001 Dart Helicopters Services	Drawing Name	: 206L FWD X-TUBE
42586	Part Number	: D206667103BL
Rate Number : 10553	Drawing Number	: D206-667-143 REV B
P.O. Number	Project Number	: N/A
This Issue : 14/10/2008 S.O. No. :	Drawing Revision	:
Prsht Rev. : NC	Material	:
First Issue : / / Type : CROSSTUBES	Due Date	: 04/11/2008 Qty: 1 Um: Each
Previous Run : 42585		
Written By :		
Checked & Approved By : <u>JLD 08.10.14</u>		
Comment		
Est Rev:F 05.09.01 Add holes for compatibility with Bell		
Skid tubes KJ/JLM		
Est Rev:G 08-06-03 update as per DSI9415 (ECN1198) DD		
verified by:		

Additional Product

Job Number: 

Seq #	Machine Or Operation:	Description
-------	-----------------------	-------------

1.0	DC	DOCUMENT CONTROL
-----	----	------------------



JLD 08.11.10



Comment: DOCUMENT CONTROL
Photocopy bluefile and create labels as per PPP D206-667-103 CHG003

2.0	PACKAGING 1	PACKAGING RESOURCE #1
-----	-------------	-----------------------



Comment: PACKAGING RESOURCE #1

3.0	D206667103TRN	Crosstube Turning Detail
-----	---------------	--------------------------



Comment: Qty.: 1.0000 Each(s)/Unit Total: 1.0000 Each(s)
CROSTUBE TURNING DETAIL
batch B42301

08-10-20 MB

4.0	BENDING	BENDING MACHINE - SKIDTUBES
-----	---------	-----------------------------



Comment: BENDING MACHINE
Bend tube as per Dwg D206-667-143 using CNC bender program 206B-fw and Folio FT

08-10-21 MB

5.0	CROSSTUBES	CROSSTUBES RESOURCE 1
-----	------------	-----------------------



Comment: LANDING GEAR RESOURCE 1





1-Drill holes & ream using drill Jig DT8541 & DT8542 as per Dwg D206-667-143. Drill all (3) top holes.
3-Flip tube and switch drilling Jigs from right to left, left to right. Locate Jigs off existing holes using "T" pins.

08-10-22 MB

W/O:		WORK ORDER CHANGES					
DATE	STEP	PROCEDURE CHANGE	By	Date	Qty	Approval Chief Eng / Prod Mgr	Approval QC Inspector
06-11-11	4.1	QC15 required Per bend inspect Perm change	ALBERT Jone				
		QC15	J	06-11-11	1	AS142	06-11-11

Part No: D206-667-103BL PAR #: _____ Fault Category: _____ NCR: Yes No DQA: _____ Date: _____

Resolution: _____ Disposition: _____ QA: N/C Closed: _____ Date: _____

NCR: 42586		WORK ORDER NON-CONFORMANCE (NCR)						
DATE	STEP	Description of NC Section A	Corrective Action Section B			Verification Section C	Approval Chief Eng	Approval QC Inspector
			Initial Chief Eng	Action Description Chief Eng	Sign & Date			
08-10-21	4	Tube is high & narrow.	 08-10-21 AS142	Acceptable	N/A	 08-10-22	 08-10-21 PW AS142	 08-10-22

NOTE: Date & initial all entries

Date: Tuesday, 14/10/2008 1:16:41 PM
User: Julie Lecocq

Process Sheet

Customer: CU-DAR001 Dart Helicopters Services

Drawing Name: 206L FWD X-TUBE

Job Number: 42586

Part Number: D206667103BL

Job Number:



Seq. #:

Machine Or Operation:

Description :

4-Drill pilot holes using drill Jig DT8541 & DT8542 as per Dwg D206-667-143. Drill only the top (2) holes.

5-Drill pilot holes as per Dwg D206-667-143. Drill only the top (2) holes.

6-Drill Fwd rivet holes using drill Jig DT8787FWD as per Dwg D206-667-143.

Note: Fwd side has 3x top holes.

7-Drill Aft rivet holes using drill Jig DT8787AFT as per Dwg D206-667-141.

8-C'sink holes as per Dwg D206-667-143. Allow rivet to sit below surface to compensate for paint.

9-Deburr & Inspect for surface damage. Repair damage within limits as per Dwg D206-667-143

10-Scribe part # and batch # using vibrating stylus as per Dwg D206-667-143.

Inside of Cuff (Do not engrave on outside of tube)

MR DD
8-10-22
AWM 8-10-22
DD MR 8-10-22

6.0

HAND FINISHING1

HAND FINISHING RESOURCE #1



AWM 8-10-22



Comment: HAND FINISHING RESOURCE #1

Chemical Conversion Coat as per QSI 005 4.1

7.0

QC3

INSPECT POWDER COAT/CHEMICAL CONVERSION



Comment: INSPECT POWDER COAT/CHEMICAL CONVERSION

8-10-22 (X)

8.0

QC5

INSPECT WORK TO CURRENT STEP



Comment: INSPECT WORK TO CURRENT STEP

8-10-22 (X)

9.0

OUTSIDE SERV.11

OUTSIDE SERVICE -CROSSTUBES



710: 7442 040810/24 10



Comment: Sub-Contracting OUTSIDE SERVICE -CROSSTUBES

10.0

PACKAGING 1

PACKAGING RESOURCE #1



Comment: PACKAGING RESOURCE #1

Inspect for transit damage

Ensure copy of NDT results attached to work order.

8-10-23 (1)

W/O:		WORK ORDER CHANGES					
DATE	STEP	PROCEDURE CHANGE	By	Date	Qty	Approval Chief Eng / Prod Mgr	Approval QC Inspector

Part No: _____ PAR #: _____ Fault Category: _____ NCR: Yes No DQA: _____ Date: _____

Resolution: _____ Disposition: _____ QA: N/C Closed: _____ Date: _____

NCR:		WORK ORDER NON-CONFORMANCE (NCR)						
DATE	STEP	Description of NC Section A	Corrective Action Section B			Verification Section C	Approval Chief Eng	Approval QC Inspector
			Initial Chief Eng	Action Description Chief Eng	Sign & Date			

NOTE: Date & initial all entries

Date: Tuesday, 14/10/2008 1:16:41 PM
User: Julie Lecocq

Process Sheet

Customer: CU-DAR001 Dart Helicopters Services

Drawing Name: 206L FWD X-TUBE

Job Number: 42586

Part Number: D206667103BL

Job Number:



Seq. #:

Machine Or Operation:

Description :

11.0

QC5/PC5
ml

DIMENSIONAL CHECK

08 11 05 ①



P10

Comment: Inspect for damage & ensure results are as per Dwg D206-667-103

12.0

SPRAY PAINTING

SPRAY PAINTING



P10

Comment: SPRAY PAINTING

1-Prime inside and outside crosstube as per QSI 005 4.2

2-

-PAINT DELFLEET BLUE

-CLEAR DELFLEET

ml 08 11 05 ①

13.0

QC14

INSPECT SPRAY PAINT



Comment: Inspect Spray Paint

Wrap in plastic bag to protect from scratches

AS, 75

RT 08-11-10

14.0

D3595075395

RUBBER CUSHION 75" x 3.95



Comment: Qty.: 4.0000 Each(s)/Unit Total: 4.0000 Each(s)

RUBBER CUSHION 75" x 3.95

B 40220^{x1} / 42998^{x3}

RT 08-11-10

15.0

D2873043

AS 01.11.11 Nut Plate Assembly



Comment: Qty.: 2.0000 Each(s)/Unit Total: 2.0000 Each(s)

Pick:

Qty Part number

Description Batch

2 D2873-043

Nut Plate 40218

RT 08-11-10

16.0

D2873045

Nut Plate Assembly



Comment: Qty.: 2.0000 Each(s)/Unit Total: 2.0000 Each(s)

Pick:



Qty Part number

Description Batch

2 D2873-045





Nut Plate 38316

RT 08-11-10

W/O:		WORK ORDER CHANGES					
DATE	STEP	PROCEDURE CHANGE	By	Date	Qty	Approval Chief Eng / Prod Mgr	Approval QC Inspector
08-11-11	11.0	QC S required for LPI inspection. perm change	E	08.11.11		 08.11.11	 08.11.11

Part No: D206667-103BL PAR #: _____ Fault Category: _____ NCR: Yes No DQA: _____ Date: _____

Resolution: _____ Disposition: _____ QA: N/C Closed: _____ Date: _____

NCR: 42586		WORK ORDER NON-CONFORMANCE (NCR)						
DATE	STEP	Description of NC Section A	Corrective Action Section B			Verification Section C	Approval Chief Eng	Approval QC Inspector
			Initial Chief Eng	Action Description Chief Eng	Sign & Date			
08-11-06	12.0	Blue is slightly thin in some areas on the ends of the tubes. Apparent in the sun light. R.C. No grey epoxy for the base had to use yellow, & not enough coats of blue.	 Q51042	Scuff & re-coat blue. per Q51005	M 08/11/08	 08.11.11	 Q51042	 08-11-06
				future w/p's will include 'grey'	u 08.11.13			

NOTE: Date & initial all entries

Date: Tuesday, 14/10/2008 1:16:41 PM
User: Julie Lecocq

Process Sheet

Customer: CU-DAR001 Dart Helicopters Services

Drawing Name: 206L FWD X-TUBE

Job Number: 42586

Part Number: D206667103BL

Job Number:



Seq. #:

Machine Or Operation:

Description :

17.0

D28911

2.25 Support



Comment: Qty.: 2.0000 Each(s)/Unit Total : 2.0000 Each(s)

Pick:

Qty Part number Description Batch

2 D2891-1

Support

42565

RT 08-11-10

18.0

MS20601AD4W8

RIVET



Comment: Qty.: 14.0000 Each(s)/Unit Total : 14.0000 Each(s)

Pick:

Qty Part number Description Batch

14 MS20601AD4W8 Rivet

106521

RT 08-11-04

19.0

MS2192020

Clamp (per MIL-DTL-8783C)



Comment: Qty.: 4.0000 Each(s)/Unit Total : 4.0000 Each(s)

Pick:

Qty Part number Description Batch

4 MS21920-20

Clamp

107501

RT 08-11-10

20.0

CROSSTUBES

CROSSTUBES RESOURCE 1



Comment: LANDING GEAR RESOURCE 1

1-Install abrasion strips as per QSI 035 using DT8570. Note: (2) Aft holes should be facing up.

RT 08-09-14

2-Install supports and clamps as per Dwg D4206-667-143. Torque clamps to 80-100 in lb

Magnabond 6397

SEE DSI 9415

RT 08-11-10

3-Install nut plates as per Dwg D206-667-143. Touch-up rivet heads with Imron paint.

RT 08-11-04

21.0

QC5

INSPECT WORK TO CURRENT STEP



Comment: INSPECT WORK TO CURRENT STEP

22.0

PACKAGING 1

PACKAGING RESOURCE #1



Comment: PACKAGING RESOURCE #1

Pick Packing Kit

W/O:		WORK ORDER CHANGES					
DATE	STEP	PROCEDURE CHANGE	By	Date	Qty	Approval Chief Eng / Prod Mgr	Approval QC Inspector

Part No: _____ PAR #: _____ Fault Category: _____ NCR: Yes No DQA: _____ Date: _____

Resolution: _____ Disposition: _____ QA: N/C Closed: _____ Date: _____

NCR:		WORK ORDER NON-CONFORMANCE (NCR)						
DATE	STEP	Description of NC Section A	Corrective Action Section B			Verification Section C	Approval Chief Eng	Approval QC Inspector
			Initial Chief Eng	Action Description Chief Eng	Sign & Date			

NOTE: Date & initial all entries

Date: Tuesday, 14/10/2008 1:16:41 PM
User: Julie Lecocq

Process Sheet

Customer: CU-DAR001 Dart Helicopters Services

Drawing Name: 206L FWD X-TUBE

Job Number: 42586

Part Number: D206667103BL

Job Number:



Seq. #:

Machine Or Operation:

Description :

23.0

AN532A

Bolt



Comment: Qty.: 4.0000 Each(s)/Unit Total : 4.0000 Each(s)

Bolt

Batch: M109068

24.0

MS21042L5

Nut



Comment: Qty.: 4.0000 Each(s)/Unit Total : 4.0000 Each(s)

Nut

Batch: M108827

25.0

AN57A

Bolt



Comment: Qty.: 10.0000 Each(s)/Unit Total : 10.0000 Each(s)

Pick:Packing Kit

Qty Part number

Description Batch

10 AN5-7A

Bolt

M109061

26.0

AN530A

BOLT



Comment: Qty.: 4.0000 Each(s)/Unit Total : 4.0000 Each(s)

Pick:Packing Kit

Qty Part number

Description Batch

4 AN5-30A

Bolt

M105144

27.0

AN960JD516

Washer



Comment: Qty.: 18.0000 Each(s)/Unit Total : 18.0000 Each(s)

Pick:Packing Kit

Qty Part number

Description Batch

18 AN960JD516

Washer

M109282

28.0

QC4

INSPECT 100% KITS FOR COMPLETENESS



Comment: INSPECT 100% KITS FOR COMPLETENESS

29.0

PACKAGING 1

PACKAGING RESOURCE #1



Comment: PACKAGING RESOURCE #1

Identify and pack for shipping as per PPP D206-667-103

Location:

PPP Rev: S

8/11/10

54

W/O:		WORK ORDER CHANGES					
DATE	STEP	PROCEDURE CHANGE	By	Date	Qty	Approval Chief Eng / Prod Mgr	Approval QC Inspector

Part No: _____ PAR #: _____ Fault Category: _____ NCR: Yes No DQA: _____ Date: _____

Resolution: _____ Disposition: _____ QA: N/C Closed: _____ Date: _____

NCR:		WORK ORDER NON-CONFORMANCE (NCR)						
DATE	STEP	Description of NC Section A	Corrective Action Section B			Verification Section C	Approval Chief Eng	Approval QC Inspector
			Initial Chief Eng	Action Description Chief Eng	Sign & Date			

NOTE: Date & initial all entries

Date: Tuesday, 14/10/2008 1:16:41 PM
User: Julie Lecocq

Process Sheet

Customer: CU-DAR001 Dart Helicopters Services

Drawing Name: 206L FWD X-TUBE

Job Number: 42586

Part Number: D206667103BL

Job Number:



Seq. #:

Machine Or Operation:

Description :

30.0

QC21

FINAL INSPECTION/W/O RELEASE



08/11/12 *[Signature]*

Comment: FINAL INSPECTION/W/O RELEASE

Job Completion



u 8/11/12

B 42586 D206-667-103

W/O:		WORK ORDER CHANGES					
DATE	STEP	PROCEDURE CHANGE	By	Date	Qty	Approval Chief Eng / Prod Mgr	Approval QC Inspector

Part No: _____ PAR #: _____ Fault Category: _____ NCR: Yes No DQA: _____ Date: _____


Resolution: _____ Disposition: _____ QA: N/C Closed: _____ Date: _____

NCR:		WORK ORDER NON-CONFORMANCE (NCR)						
DATE	STEP	Description of NC Section A	Corrective Action Section B			Verification Section C	Approval Chief Eng	Approval QC Inspector
			Initial Chief Eng	Action Description Chief Eng	Sign & Date			

NOTE: Date & initial all entries

DART AEROSPACE LTD		Work Order:	42586
Description: Crosstube High Fwd (206L)		Part Number:	D206-667-103
Inspection Dwg: D206-667-143 Rev: B		Page 1 of 1	

Required Dimension	Min	Max
Height	23.46	23.58
1/2 Span	41.86	41.98
Angle	54	56
Total Span	83.72	83.96

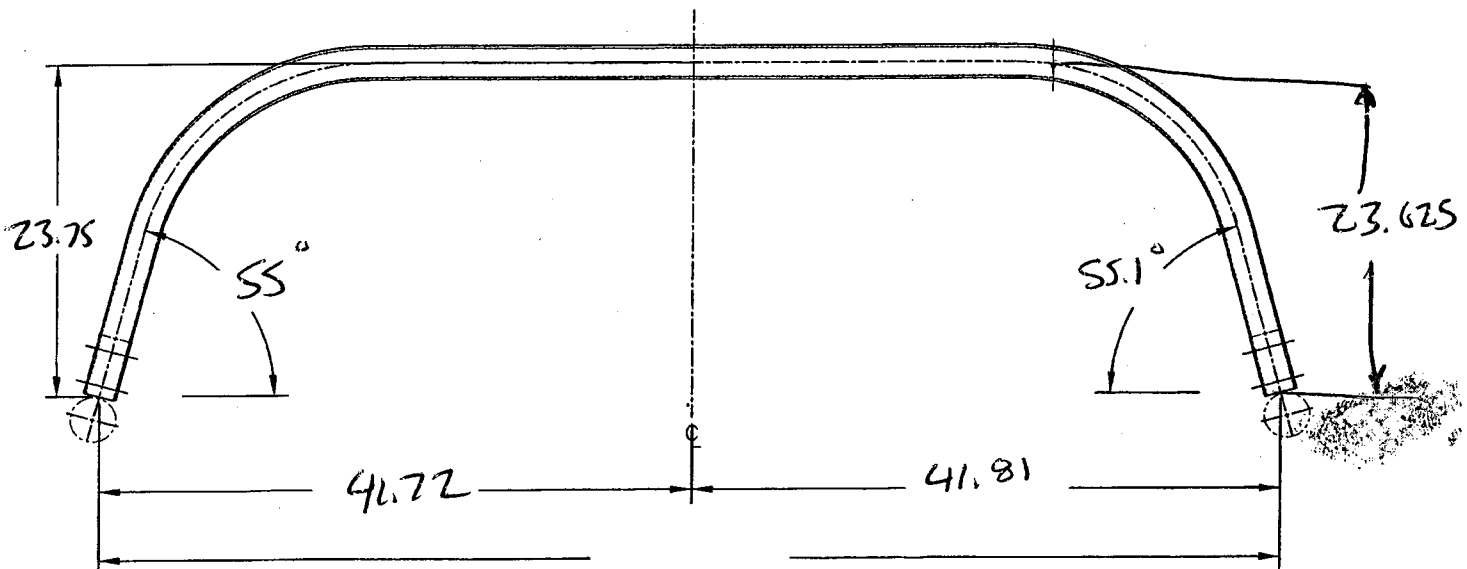

Comments
High & narrow - Acceptable

QC15 Inspection	<i>[Signature]</i>
Date	

02.10.21

Rev	Date	Change	Revised by	Approved
A	07.02.06	New Issue	KJ/JM <i>[Signature]</i>	<i>[Signature]</i>

DART

DESIGN PH	DRAWN BY PH	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
CHECKED HDS	APPROVED HDS	DRAWING NO. D206-667-143	REV. B SHEET 1 OF 3
DATE 05.07.26		TITLE CROSSTUBE ASS'Y (206L HIGH FWD)	SCALE NTS
A	00.11.17	NEW ISSUE	
B	05.07.26	ADD HOLES AND NUT PLATES FOR COMPATABILITY WITH BHT/AA SKIDTUBES	

RELEASED
05-07-26**UNDER REVIEW**05.08.10 PH
re-draw detail F
01.10.14

Qty	Part Number	Description
X	D206-667-143	CROSSTUBE ASSEMBLY (206L HIGH FWD)
1	D6002-115	CROSSTUBE
2	D2873-043	NUT PLATE
2	D2873-045	NUT PLATE
2	D2856-400-694	ABRASION STRIP
2	D2891-1	SUPPORT
14	MS20601AD4W8	RIVET (OR NAS9302B-4-8)
4	MS21920-20	CLAMP

SEE
DSJ 9415**GENERAL NOTES:**


- 1) TOLERANCES ARE PER DART QSI 018 UNLESS OTHERWISE NOTED.
- 2) MATERIAL: MANUFACTURED FROM D6002-115
FINISHED LENGTH = 104.98±0.020
- 3) FINISH: CHEMICAL CONVERSION COAT PER DART QSI 005 4.1
PRIME INSIDE AND OUTSIDE PER DART QSI 005 4.2
PAINT OUTSIDE PER DART QSI 005 4.2
- 4) PART IS SYMMETRIC ABOUT CENTERLINE.
- 5) RUN-OFF PART. BLEND OUT EDGE LONGITUDINALLY, TRANSITION SHOULD BE SMOOTH.
- 6) BEND PROGRESSIVELY WITH A MINIMUM OF 10 PASSES. MAXIMUM TUBE FLATTENING DUE TO BENDING IS 6% BASED ON O.D.
- 7) LIQUID PENETRANT INSPECT OUTSIDE SURFACE OF CROSSTUBE PER QSI 038.
- 8) SCRIBE DART PART NUMBER AND BATCH NUMBER IN THIS AREA WITH VIBRATING STYLUS.
- 9) INSTALL ~~D2856-400-694 ABRASION STRIP~~ WITH A 0.13 (REF) GAP ON BOTTOM SIDE OF CROSSTUBE, CENTERED OPPOSITE D2891-1 SUPPORT, PER QSI-035.
- 10) EXTREME CARE MUST BE TAKEN TO PROTECT THE OUTSIDE SURFACE OF THE TUBE. THE OUTSIDE SURFACE MUST BE SMOOTH AND FREE FROM SURFACE DEFECTS SUCH AS SCRATCHES, NICKS, OR DENTS. DEFECTS UP TO 0.005" MAY BE BLENDED OUT LONGITUDINALLY. CIRCUMFERENTIAL GRIND MARKS ARE UNACCEPTABLE.
- 11) IT IS OPTIONAL TO SEAL EDGES OF SUPPORTS AND ABRASION STRIP USING SIKAFLEX-241/291 SEALANT.
- 12) TORQUE CLAMPS 80 TO 100 IN-LB.

SHOP COPY
RETURN TO
ENGINEERING
UNCONTROLLED COPY
SUBJECT TO AMENDMENT
WITHOUT NOTICE
WORK ORDER
NO. 42584SEE
DSJ 9415

Copyright © 2000 by DART AEROSPACE LTD

THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.

DETAIL A: CROSSTUBE CUFF

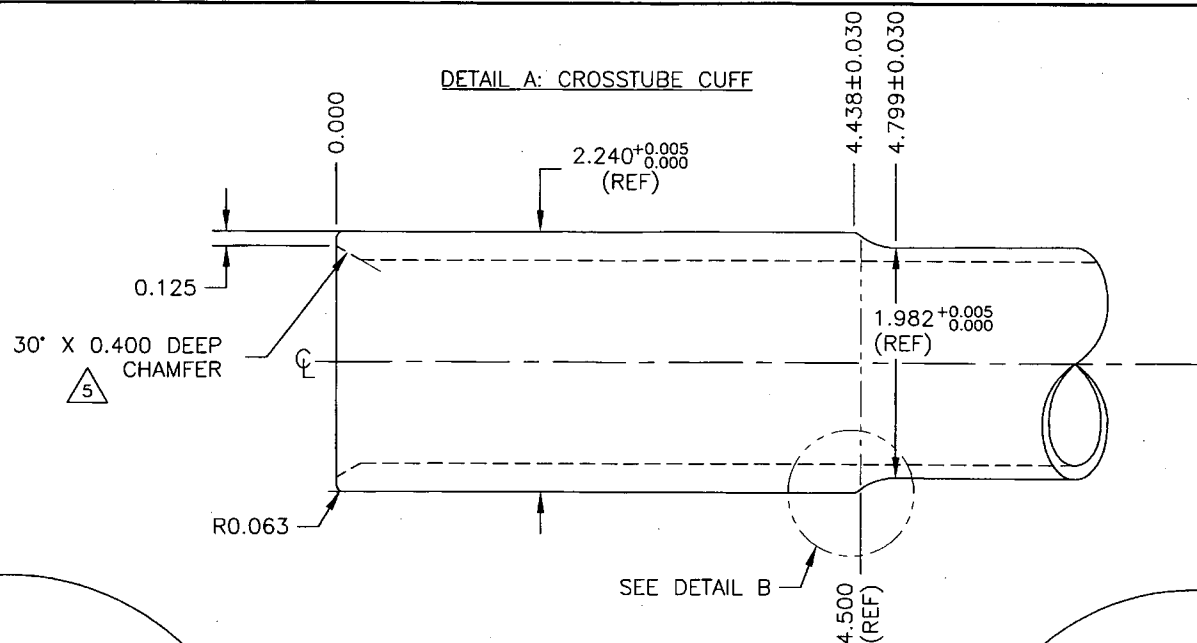

05.07.26 #


UNDER REVIEW

06.08.16 PH

re-drawn detail F


PH

08.10.14

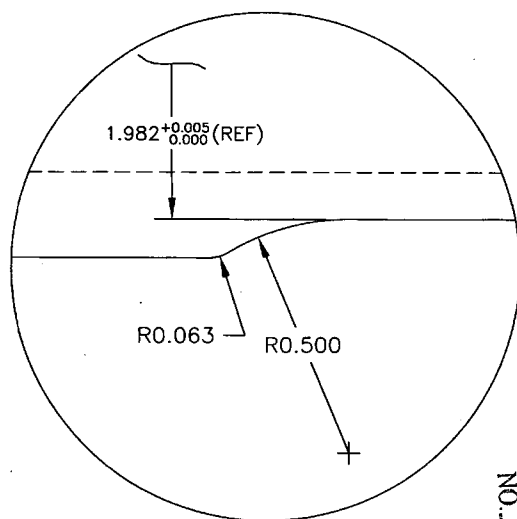

DETAIL B: CUFF
TRANSITION
SCALE 4:1

DETAIL C:
TAPER RUN-OFF
NOT TO SCALE

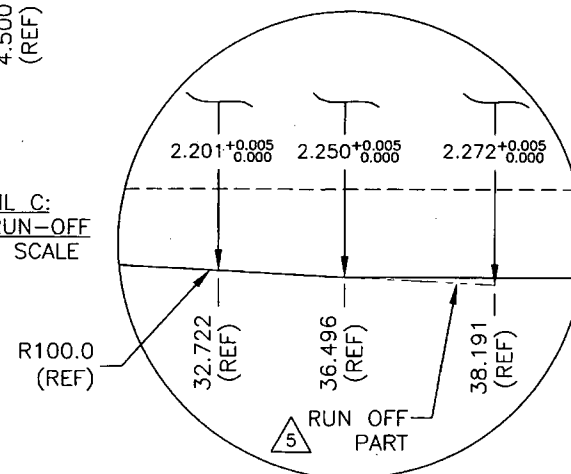

NO. 40580

WORK ORDER

UNCONTROLLED COPY

ENGINEERING

RETURN TO

SHOP COPY

SUBJECT TO AMENDMENT

WITHOUT NOTICE

COPYRIGHT © 2000 BY DART AEROSPACE LTD.		DESIGN	DRAWN BY	DART DART AEROSPACE LTD. HARRISBURG, ONTARIO, CANADA	
THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.		PH	PH	REV. B	
CHECKED		PH	PH	DRAWING NO.	SHEET 3 OF 3
DATE		05.07.26		D206-667-143	
				TITLE	SCALE
				CROSSTUBE ASS'Y (206L HIGH FWD)	1:1

SHOP COPY
RETURN TO
ENGINEERING
UNCONTROLLED COPY
SUBJECT TO AMENDMENT
WITHOUT NOTICE
WORK ORDER
NO. 42586

DART SERVICE INSTRUCTION

TO AMEND INSTALLATION INSTRUCTIONS IIN-D206-667 REV. C AND
INSTRUCTIONS FOR CONTINUED AIRWORTHINESS ICA-D206-667 REV. 2
REF: CANADIAN STC: SH01-5
REF: FAA STC: SR01304NY

For D206-667-101/-201/-103/-203 or D407-667-105 cross tubes at CHG 003 or later, the D2856-400-694/-773 abrasion strip has been removed, the center D2891-1 or D2892-1 support has been bonded onto the crosstube using Magnabond 6398 and D3595-075-395/-450 Rubber Cushions have been installed underneath the MS21920-20/-22 Clamps. Amend parts list of the IIN-D206-667 section 5 and ICA-D206-667 Section 32.8 as follows:

REMOVE:

ITEM	QTY -101	QTY -201	QTY -103	QTY -203	QTY -105	PART NUMBER	DESCRIPTION
13	2	2	2		2	D2856-400-694	ABRASION STRIP
14				2		D2856-400-773	ABRASION STRIP

ADD:

ITEM	QTY -101	QTY -201	QTY -103	QTY -203	QTY -105	PART NUMBER	DESCRIPTION
24	4	4	4		4	D3595-075-395	RUBBER CUSHION
25				4		D3595-075-450	RUBBER CUSHION

-075063 PH 06.11.11

To prevent the supports from shifting on the D206-667-101/-201/-103/-203 or D407-667-105 crosstubes at CHG 002 or earlier, the D2891-1/D2892-1 supports should be removed and re-installed as follows:

- 1) Follow section 32.1 of ICA-D206-667 for the removal of the crosstubes from the helicopter.
- 2) Remove the qty (2) MS21920-20/-22 clamps from the crosstube that fasten the D2891-1/D2892-1 supports to the crosstube.
- 3) Remove the D2856-400-694/-773 abrasion strip from the crosstube per section 32.5 of ICA-D206-667.
- 4) Inspect the crosstube surface underneath the support for corrosion and mechanical damage per items 5.3.1 and 5.3.2 of the 300 hour inspection of ICA-D206-667. Repair damage within acceptable limits per item 5.3.3 of the 300 hour inspection in ICA-D206-667. Touch up finish per item 5.3.9 of the 300 hour inspection.
- 5) Abrade area to which support will be applied with 400 grit sandpaper. Saturate a clean cloth with MEK or 4105S Wash'n'Wipe Degreaser or equivalent and wipe area until there is no residue.
- 6) Apply a 0.03" to 0.06" thick layer of Magnabond 6398 underneath the D2891-1/D2892-1 support and re-install the support on the crosstube as shown in Figure 1. Position and secure the D2891-1/D2892-1 support on the crosstube using MS21920-20/-22 Clamps. Install a D3595-075-395/-450 Rubber cushion underneath each MS21920-20/-22 Clamp. Torque clamps 80-100 in-lb. Let the D206-667-101/-201/-103/-203 or D412-667-105 crosstube assembly cure as per the Magnabond 6398 instructions before re-installing the crosstube on the aircraft.

CANADA
DEPARTMENT OF TRANSPORT
AIRCRAFT CERTIFICATION
BRANCH
DAO # 01-O-01

APPROVED

BY: [Signature]
D. SHEPHERD (DE # 02)

DATE: 08.05.26
CERT. NO.: SH01-5
ISSUE NO.: 3

A	NEW ISSUE	HS	08.05.26
REV.	DESCRIPTION	BY	DATE
DESIGN	HS	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
DRAWN	HS		
CHECKED	PH	DRAWING NO.	REV. A
MFG. APPR.	[Signature]	DSI 9415	SHEET 1 OF 2
APPROVED	[Signature]	TITLE	SCALE
DE APPR.	[Signature]	CROSSTUBE SUPPORT CHANGE NTS	
DATE	08.05.26	COPYRIGHT © 2008 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	

7) Re-install the D206-667-101/-201/-103/-203 or D412-667-105 crosstube per section 32.2 of ICA-D206-667.

For customers who would like to upgrade their D206-667-101/-201/-103/-203 or D412-667-105 crosstubes from CHG 002 or earlier to CHG 003, the following kit can be obtained from Dart:

QTY -011	QTY -013	PART NUMBER	DESCRIPTION
X		DSI 9415-011	CROSSTUBE SUPPORT CHANGE (USABLE ON D206-667-101/-201/-103 OR D407-667-105)
	X	DSI 9415-013	CROSSTUBE SUPPORT CHANGE (USABLE ON D206-667-203)
4		D3595-075-395	RUBBER CUSHION
	4	D3595-075-450	RUBBER CUSHION

CROSSTUBE
D206-667-101
D206-667-201
D206-667-103
D206-667-203
D407-667-105
REF

D2891-1 OR D2892-1
SUPPORT

CROSSTUBE
D206-667-101
D206-667-201
D206-667-103
D206-667-203
D407-667-105
REF

MS21920-20/-22
CLAMP

MAGNABOND 6398 BETWEEN D2891-1/D2892-1
SUPPORT AND CROSSTUBE

D3595-075-395/-450 RUBBER CUSHION
(REF) (2 PLACES)

SECTION A-A

PART NUMBER	DISTANCE "X"
D206-667-101	13.08"
D206-667-201	13.08"
D206-667-103	13.08"
D206-667-203	10.03"
D407-667-105	13.08"

FIGURE 1 - CROSSTUBE SUPPORT

SHOP COPY
RETURN TO
ENGINEERING
UNCONTROLLED COPY
SUBJECT TO AMENDMENT
WITHOUT NOTICE
WORK ORDER
NO 42506


CANADA
DEPARTMENT OF TRANSPORT
AIRCRAFT CERTIFICATION
BRANCH
DAO # 01-O-01

APPROVED

BY: *D. Shepherd*
D. SHEPHERD (DE # 02)

DATE: 08.05.26
CERT. NO.: SH01-5
ISSUE NO.: 3

DESIGN	HS	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
DRAWN	HS		
CHECKED	PH	DRAWING NO.	REV. A
MFG. APPR.	<i>E</i>	DSI 9415	SHEET 2 OF 2
APPROVED	<i>[Signature]</i>	TITLE	SCALE
DE APPR.	<i>[Signature]</i>	CROSSTUBE SUPPORT CHANGE	NTS
DATE	08.05.26	COPYRIGHT © 2008 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	

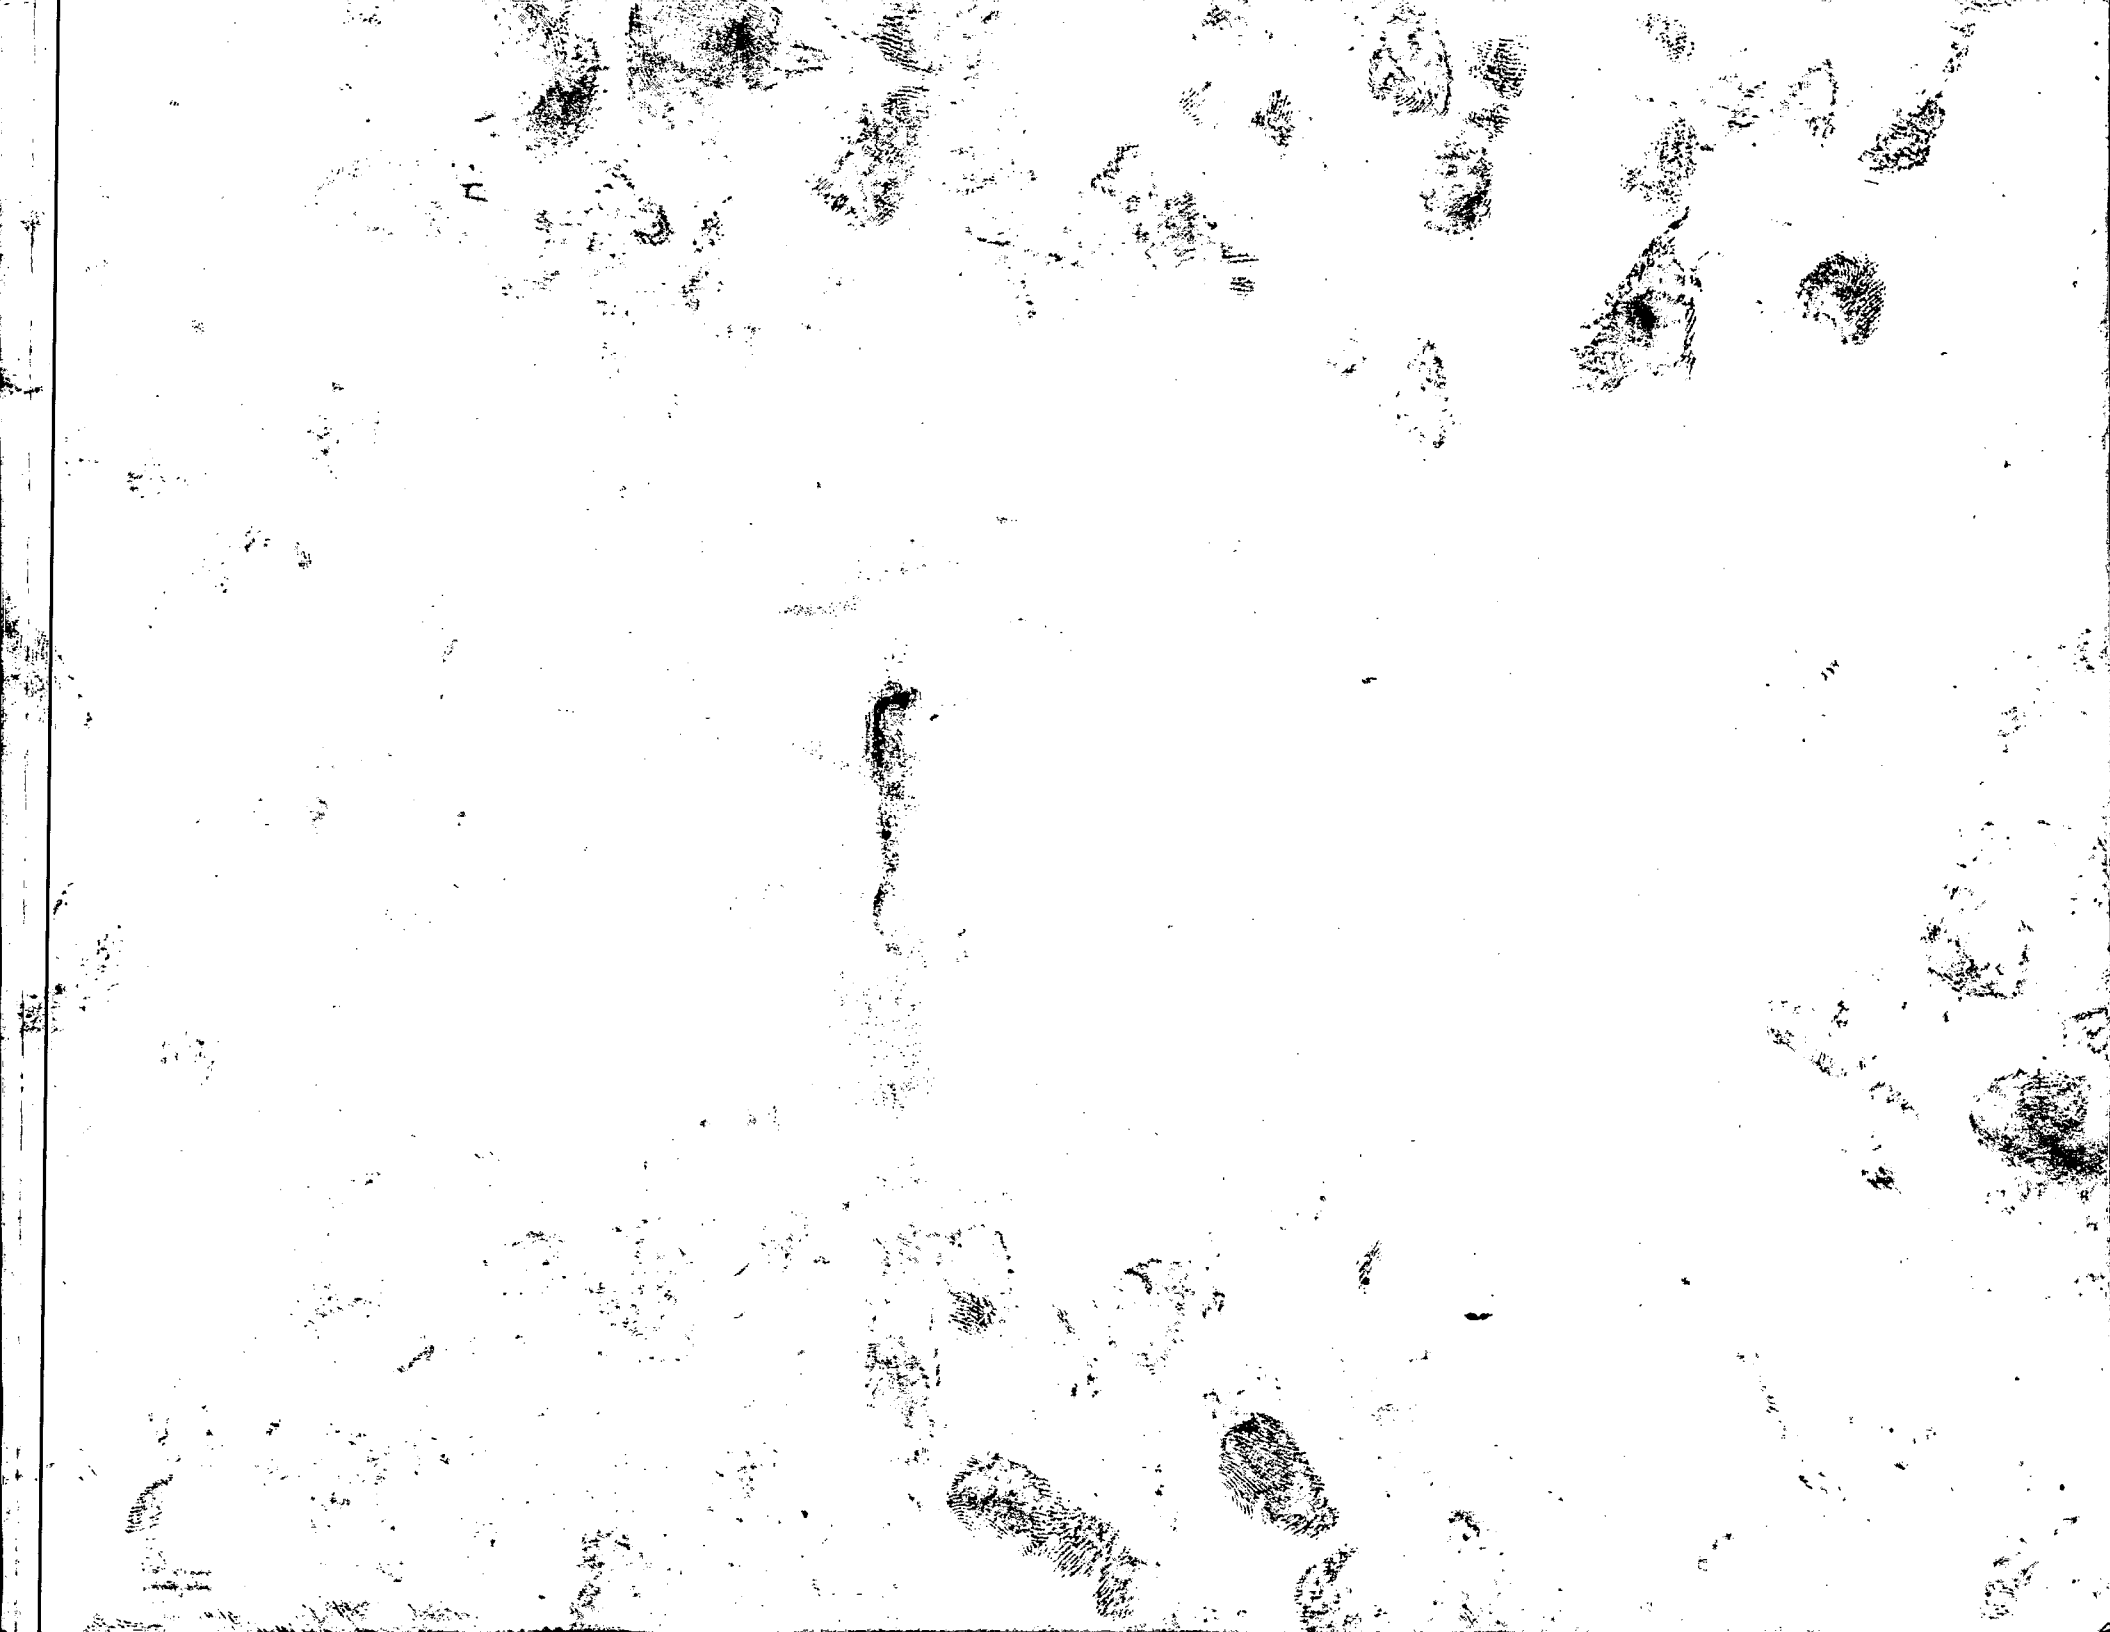



LIQUID PENETRANT TEST REPORT

P- 09129

PAGE 1 OF 1

CLIENT

ATTENTION

ADDRESS

PROJECT

ITEM(S) EXAMINED

DATE

ACUREN JOB NO.

PO/NO.

WORK LOCATION

ACCEPTANCE STD.

TIME

AM ☐ PM ☐

Dart Aerospace
Chantal
1270 Aberdeen St.
Hawkesbury, Ont

2008-10-23
188-08-1581

7442

Hawkesbury

ASTM M17/021-038 REV./DATE 2005

206 (FWD) X-TUBE, 412 X-TUBE INST. LOW MARGO AFT

Job #'s 42585 (42586), 41920, 41921

JOB DESCRIPTION

PROCEDURE NO. LT-0002 REV./DATE

TECHNIQUE NO. LT-0002 REV./DATE

PART NO. D206667103BL, D412664205

MATERIAL ALODINE ALUM. THICKNESS N/A

SCOPE WET FLOUORESCENT LIQUID PENETRANT INSPECTION CARRIED OUT ON 100%
EXTERNAL SURFACE

TEST DETAILS

ETHOD	<input checked="" type="checkbox"/> FLUORESCENT	<input type="checkbox"/> VISIBLE	<input checked="" type="checkbox"/> WATER WASH	<input type="checkbox"/> SOLVENT REMOVABLE	<input type="checkbox"/> POST EMULSIFIED
FAMILY BRAND	MagnaBlue		BLACK LIGHT S/N	8171	<input type="checkbox"/> OUTPUT > 1000 μ W/cm ²
ENETRANT	MINIMUM DWELL TIME	30 MIN.	LIGHTING EQUIP.	<input type="checkbox"/> FLASHLIGHT	<input type="checkbox"/> TROUBLELIGHT
ENETRANT REMOVER	MINIMUM DRY TIME	>10 MIN.	OTHER	CAL FEB 12 09	
EVELOPER	MINIMUM DWELL TIME	10 MIN.	LIGHT METER S/N	CAL DUE DATE	
EVELOPER TYPE	<input checked="" type="checkbox"/> NON AQUEOUS	<input type="checkbox"/> AQUEOUS	<input type="checkbox"/> DRY		

TEST SURFACE

SURFACE CONDITION	<input type="checkbox"/> AS GROUND	<input type="checkbox"/> AS WELDED	<input type="checkbox"/> MACHINED	<input type="checkbox"/> SHOT BLASTED	<input checked="" type="checkbox"/> CLEAN BARE METAL
SURFACE TEMPERATURE	<input type="checkbox"/> < - 4°C/ 20°F	<input type="checkbox"/> - 4°C/ 20°F TO 10°C/50°F	<input checked="" type="checkbox"/> 10°C/50°F TO 52°C/125°F	<input type="checkbox"/> > 52°C/125°F	

RESULTS- (☐ METRIC ☐ IMPERIAL)

ITEM	COMMENTS	ACCEPT	REJECT
12585:	ACCEPTABLE		
12586:	ACCEPTABLE		
11920:	ACCEPTABLE		
11921:	ACCEPTABLE		

MA 08 11 05

Scope of Services: The agreement of Acuren Group Inc. to perform services extends only to those services provided for in writing. Under no circumstances shall such services extend beyond the performance of the requested services. It is expressly understood that all descriptions, comments and expressions of opinion reflect the opinions or observations of Acuren Group Inc. based on information and assumptions supplied by the owner/operator and are not intended nor can they be construed as representations or warranties. Acuren Group Inc. is not assuming any responsibilities of the owner/operator and the owner/operator retains complete responsibility for the engineering, manufacture, repair and use decisions as a result of the data or other information provided by Acuren Group Inc. In no event shall Acuren Group Inc.'s liability in respect of the services referred to herein exceed the amount paid for such services.

Standard of Care: In performing the services provided, Acuren Group Inc. uses the degree, care and skill ordinarily exercised under similar circumstances by others performing such services in the same or similar locality. No other warranty, expressed or implied, is made or intended by Acuren Group Inc.

SIGNATURES

CLIENT REPRESENTATIVE

Chantal Lamoie

Chantal Lamoie

DTR #

TECHNICIAN (SIGNATURE):

Frederick Chagnon

NAME (PRINT):

1ST TECHNICIAN

CGSB LEVEL II SNT LEVEL II

CGSB REG. NO. 10560

2ND TECHNICIAN

CGSB LEVEL SNT LEVEL

CGSB REG. NO.

REPORT

REVIEWED BY:

NAME

INITIALS

WHITE - CLIENT COPY

CANARY - OFFICE COPY

PINK - TECHNICIAN COPY

GOLD - OFFICE COPY

PT Sept 2005